



TE-NA, 2105 VA 230 – 240/12 V 0/50/60 Hz
Dimming via trailing-edge phase dimmer


Product description

- Short-circuit shutdown feature with automatic restart
- Safety tested according to EN 61046
- Function tested according to EN 61047
- Overtemperature and overload protection by reducing power and automatic restart
- Screw terminal
- Not suitable for operation with MR16 LED bulbs



Technical data

Protection class	II
Mains frequency	50 / 60 Hz
Efficiency	> 94 %
λ	> 0.95
Max. cable length secondary	2 m

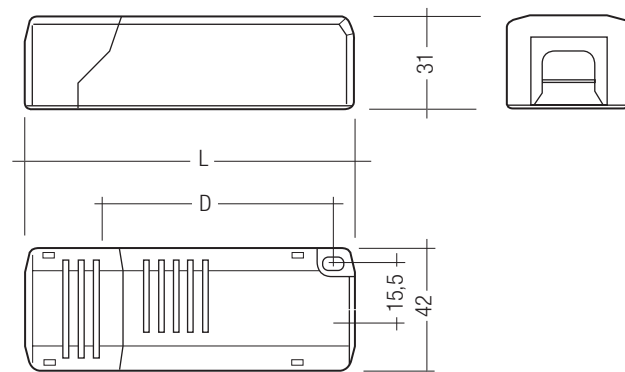

Ordering data

Lamp wattage	Dimensions LxWxH	Distance between mounting holes (D)	Dimming	Type	Article number
35 – 105 VA	120 x 42 x 31 mm	86 – 88 mm	Trailing-edge phase control	TE-NA 2105	24034919

Packaging: 20 pieces/carton, 960 pieces/pallet

Specific technical data

Type	Rated supply voltage AC	Rated current (at 230 V 50 Hz)	Secondary voltage 230 V	Secondary voltage 240 V	Operating frequency	Ambient temperature t_a	Max. casing temperature	Soft-start	Weight
TE-NA 2105	230 – 240 V	0.48 A	11.25 V	11.75 V	35 kHz	0 ... +55 °C	95 °C	yes	0.15 kg

