



## SPD 10kV PC1 CE SNC

Surge protection

### Product description

- Terminal L' is the fused output which would disconnect the LED Driver from the mains line in the event of an over temperature or during an above maximum surge pulse
- Universal use for street, tunnel or object lighting
- Flexible installation
- Fixed via integrated elongated holes
- Compact design
- Optical status indicator
- Stub or through-wiring connection
- Double or reinforced insulation
- 5-year guarantee



### Housing properties

- Casing: plastic, grey
- Type of protection IP20

### Typical applications

- Perfect for in-built applications for protection class I luminaires



Standards, page 3






## SPD 10kV PC1 CE SNC

Surge protection

### Technical data

Rated supply voltage	100 – 277 V
AC voltage range	100 – 320 V
Mains frequency	50 / 60 Hz
Mode of protection	L-N, L-PE, N-PE
AC system	TN-C-S, TN-S, TT
Type 2 surge protection (T2)	yes
Type 3 surge protection (T3)	yes
Rated load current	16 A
Nominal discharge current (8/20 µs), L-N, L-PE, N-PE	5 kA, 5 kA, 10 kA
Max. discharge current (8/20 µs), L-N, L-PE, N-PE	10 kA, 10 kA, 20 kA
Combination wave (1.2/50 µs), L-N, L-PE, N-PE	10 kV (5 kA), 10 kA, 20 kA
Short-circuit current rating	3 kA
Voltage protection level (at nominal discharge current (8/20 µs) and at 6 kV (1.2/50 µs)), L-N, L-PE, N-PE	≤ 1.3 kV, 1.5 kV, 1.4 kV
Residual voltage (at nominal discharge current (8/20 µs) and at combination wave (1.2/50 µs)), L-N, L-PE, N-PE	≤ 1.3 kV, 1.5 kV, 1.4 kV
TOV behavior (5 s / withstand mode)	400 V AC
TOV behavior (120 min. / safe failure mode)	528 V AC
Response time L-N, N-PE	≤ 25 ns, ≤ 100 ns
Max. backup fuse (MCB type B and C)	16 A
Ambient temperature $t_a$	-40 ... +80 °C
Storage temperature $t_s$	-40 ... +80 °C
Type of protection	IP20
Altitude (above sea level)	≤ 2,000 m
Dimensions L x W x H	56,0 x 36,5 x 34,0 mm

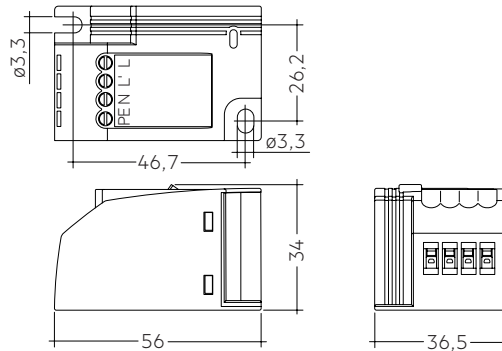

### Ordering data

Type	Article number	Packaging carton	Packaging, pallet	Weight per pc.
SPD 10kV PC1 CE SNC	28003023	10 pc(s).	5,040 pc(s).	0.038 kg

### 1. Standards

EN 61643-11

#### 1.1 Glow-wire test

according to EN 61643-11 with increased temperature of 850 °C passed.

### 2. Guarantee conditions


5-year guarantee of the product.

Surge capability: 10 x 10 kV Combination Wave pulses (1.2 / 50 µs).


### 3. Installation / wiring

#### 3.1 Circuit diagrams


Through wiring:

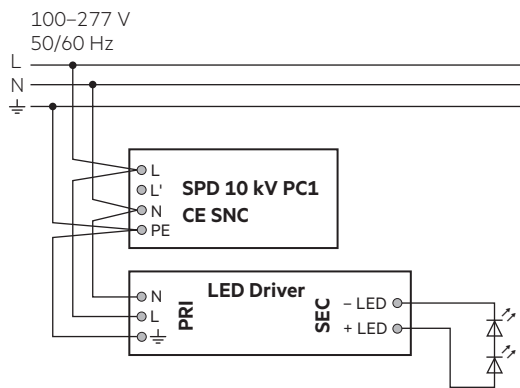


Through wiring with connection of L':

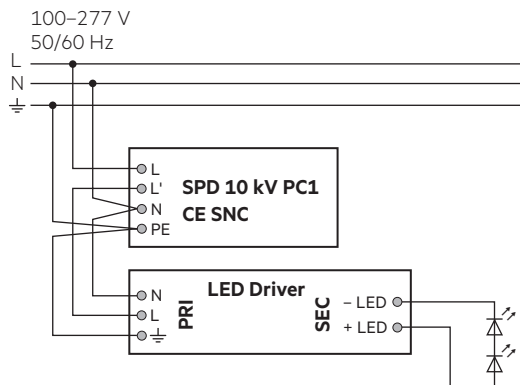

Branch wiring:

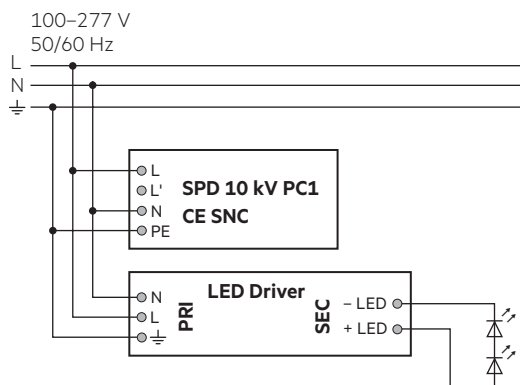

Single-branch wiring with connection of L':

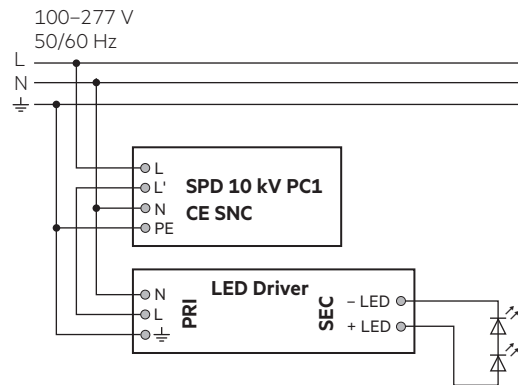

#### 3.2 Wiring type and cross section


Screw thread	M3
Tightening torque	0.6 Nm
2 conductors with same cross section, stranded	0.2 – 1.5 mm <sup>2</sup>
Conductor cross section, flexible	0.2 – 2.5 mm <sup>2</sup>
2 conductors with same cross section, solid	0.2 – 1.5 mm <sup>2</sup>
Conductor cross section, solid	0.2 – 4.0 mm <sup>2</sup>

### 4. Functions

#### 4.1 Status indicator

Indicator window turn red and AC network cut-off.

If the red indicator lights up, the device is damaged and must be replaced by appropriately qualified expert personnel.

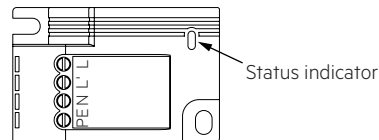

#### 4.2 Fault message

Optical surge protection fault message.

### 5. Miscellaneous

#### 5.1 Insulation testing

It is not necessary to disconnect the arrester during insulating strength measurement in electrical systems with 250 V because the measurements remain unaffected by the device.

#### 5.2 Conditions of use and storage

Humidity: 5% up to max. 95%, not condensed

Storage temperature: -40 °C up to max. +80 °C

#### 5.3 Additional information

Additional technical information at [www.tridonic.com](http://www.tridonic.com) → Technical Data

Guarantee conditions at [www.tridonic.com](http://www.tridonic.com) → Services

Life-time declarations are informative and represent no warranty claim. No warranty if device was opened.